

Starwire® Radiating Coaxial Cables

EUROPEAN STAR ON CONNECTIVITY



**N-LC SERIES
CONNECTOR**




7/16 CONNECTORS



**FLANGE SERIES
7/8" 1-5/8" 3-1/8"**



**RF MOULDED
JUMPERS**

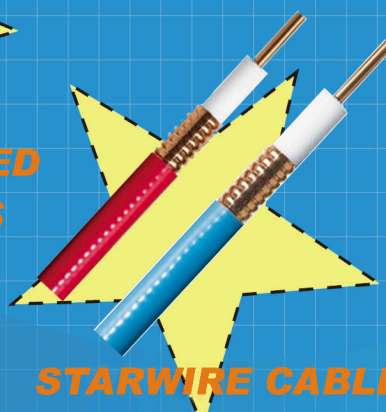

**STARWIRE CABLES
7/8" TO 1-5/8"**



**STARWIRES ENGINEERING
(SWE)**

Sponsored by

CPE ITALIA SpA



Edition Gen.2011

Preliminary Remarks

The present catalogue has been conceived in this format by CPE Italia SpA.

Aiming to show to Telecommunication Customers its flexibility, its potentiality, its involvement in the Customer successful solution, CPE Italia SpA has grouped in the following pages all products needed to implement an installation: cables, connectors to assemble the cables with an indeed very exhaustive range of configurations, accessories (grounding kits, cable clamps, tools, etc).

Throughout all shown products, Customer can just select what is more suitable to satisfy its requirements ... without worrying about quality: it is assured by CPE Italia SpA.

In fact, everything is supervised by CPE Italia SpA:

- Cables: For any reason, Customer may wish to use a specific brand already qualified and used within his organization and well accepted.

CPE ITALIA SpA,

because of its vast experience on the market can fulfil his specific request.

In the same time, CPE ITALIA SpA, by means of

STARWIRE ENGINEERING (SWE)

made by a group of highly skilled specialists and consultants driving some cable manufacturers, can provide to Customers the necessary cable with any desired characteristics and an outstanding quality.

Only the cables produced under the direct supervision of STARWIRE ENGINEERING Group constitute the Starwire® Product line.

- Connectors and adapters: no doubt about the competence of CPE Italia SpA on this domain: since 1998, its products received the "Declaration of Conformity" by the Communication Ministry. Definition of connector characteristics through its R&D office as well as the capability of production on its own is a fact started almost 15 years ago.
- Assembling: this is an other activity lasting since years. Also on this matter there is an award of the same Ministry but, in addition, there is the satisfaction of many Customers: the production average in the last 5 years is of 1.2 Million assembled cables/year.
- Grounding kit: an other design coming out from our R&D Group. Fully qualified by CESI (Italian Experimental Centre for Electricity), is produced by CPE Italia SpA at a volume of .5 Million pcs/year
- The same R&D Group, by gathering years and years of experience has defined the specifications and the production process definition of many other products: Clamps, Adapters, Connectors for elliptical wave guides, Assembled racks to interface different mobile phone operators, etc.

Conclusion: we strongly hope that the present catalogue will helpfully give to our Telecommunication Customer an exhaustive idea of its capabilities, its extensive experiences, its broad connection with extremely important Partners.

All this background, gathered in more than 30 years of presence on the market, is the key factor allowing CPE Italia SpA to offer to his Customers the best service, assistance and advises possible.

Connection Technology for Wireless Communication Systems

Due to its almost unique value added chain, CPE ITALIA SpA along with STARWIRE ENGINEERING Group is able to offer cable solutions both with copper and fiber optic elements, making up standard as well as special or hybrid cables according to our customer's requirements or whole cable systems for their optimal solutions.

Products are manufactured in selected plants scattered around the world. All these plants certified by STARWIRE ENGINEERING Group offer high-quality and environmentally compatible products (DIN EN ISO 9001 and DIN EN ISO 14001, DIN EN 9100).


CPE ITALIA SpA offers a comprehensive product range of cables, connectors and accessories for **Mobile Network Solutions**, such as GSM, CDMA, 3G, WiMAX and radio link systems.

Our **Starwire®** product line offer the whole of **Connection Technology for Wireless Communications Systems** and will be highlighted in this catalogue. Feel free to contact our sales team if you are looking for further information on a product or any other site solution to suit your special application. We are happy to provide you with the perfect cable or cable system solution!





Contents	Page
Product Introduction	2
Order Code Rules	3 to 4
<u>Radiating Coaxial Cables</u>	
RMC 75 Series (75 Ohm)	5
RMC 50L Low Loss Series (from 75 up to 450 Mhz)	6
RMC 50LM Low Loss Series (from 75 up to 900 Mhz)	7
RMC 50 MH Low Loss Series (from 150 Mhz to 2.4 Ghz)	8
RMC 50 LMH Low Loss Series (from 75 Mhz to 2.6 Ghz)	9
RMC 50L (from 75 up to 450 Mhz)	10
RMC 50LM (from 75 up to 900 Mhz)	11
RMC 50 MH (from 150 Mhz to 2.4 Ghz)	12
RMC 50 LMH (from 75 Mhz to 2.6 Ghz)	13
CMC50 Series (from 150 Mhz to 2.4 Ghz)	14 to 17
CMC50D Low Loss Series	18 to 21
CMC50B Series	22
Connectors	23
Accessories	24 to 28
Quality and Certifications	29 to 30
Notes	
Sales Network	



RADIATING COAXIAL CABLES



PRODUCT INTRODUCTION



Radiating Cable is a kind of coaxial cable whose outer conductor is incompletely sealed. During the signal transmission within radiating cable, part of the radio frequency signal can be coupled to outer space through the outer conductor slots. On the contrary, the radio frequency signal of the outer space can also be coupled into the inner part of the radiating cable through the outer conductor slots. So radiating cable has the twofold purpose to work as a transmission line and as a transmitting-receiving antenna.

Radiating cables are generally used in a specific space where normal communication antenna has difficulty if not impossibility to play a role, especially in the telecommunication system where an individual antenna would not provide adequate coverage. That means that radiating coaxial cable can adequately cover the weak or blind areas of mobile telecommunications.

CHARACTERISTICS


Through special structures designing and slot optimization grouping, the family of radiating coaxial cables shown on this catalogue have outstanding transmitting performances such as:

- ☉ Low attenuation
- ☉ Stable transmitting performances
- ☉ Excellent field strength covering performances
- ☉ Non-Contaminating fire - retardant PE outer sheath without halogen

APPLICATIONS

After special designing, radiating coaxial cable is mainly applied in tunnels, mines, intelligent buildings and railways where radio signals can be hardly transmitted or they cannot be transmitted at all in wireless telecommunications and TETRA system. The concrete applications are:

- GSM-R telecommunication system along the railway
- Mobile telecommunication system in urban track traffic (such as light rail, metro, magnetically levitated train, etc.)
- Information transmission in the FM frequency and wireless alarm signal
- Mobile telecommunication in sealed or relatively sealed buildings such as intelligent buildings, large export area, underground parks, supermarkets, etc.
- Security alarm monitor system, such as airport caution areas, military target areas, airport security systems, etc.
- Government organizations or personal target protection area (i.e.banks)




RADIATING COAXIAL CABLES




PRODUCT STRUCTURE

- **Inner Conductor:** it is a wire made of copper-clad aluminium, smooth copper tube or corrugated copper tube according to the conductor size.
- **Insulation:** it has a cellular foaming polyethylene structure. It is manufactured by a unique process by using an ozone -friendly gas. The high foaming degree guarantees low longitudinal attenuation. The foaming insulation is bonded to the inner conductor by a pre-coating layer. This layer ensures good adhesion of the inner conductor to the insulation. It also allows an easy, complete removal of the dielectric during connector installation.
- **Outer Conductor:** For radiation mode cable (RMC) an overlapping copper foil with punched slots is used. For coupling mode cabling (CMC) a corrugated copper tube with milled slots or braiding structure is used.
- **Taped covering** (optional): to overlap the copper foil outer conductor, an additional layer of tape is used to ensure the structural stability of the outer conductor during the process of production and application. Fire-retardant materials such as mica tape, can be used according to Customer demands.
- **Jacket:** The standard cable construction uses weather-resistant black polyethylene as the outer jacket. Cables are also available with a flame retardant and halogen-free outer jacket for applications requiring these features.

PRODUCT CODING RULES: RADIATING MODE COAXIAL CABLES

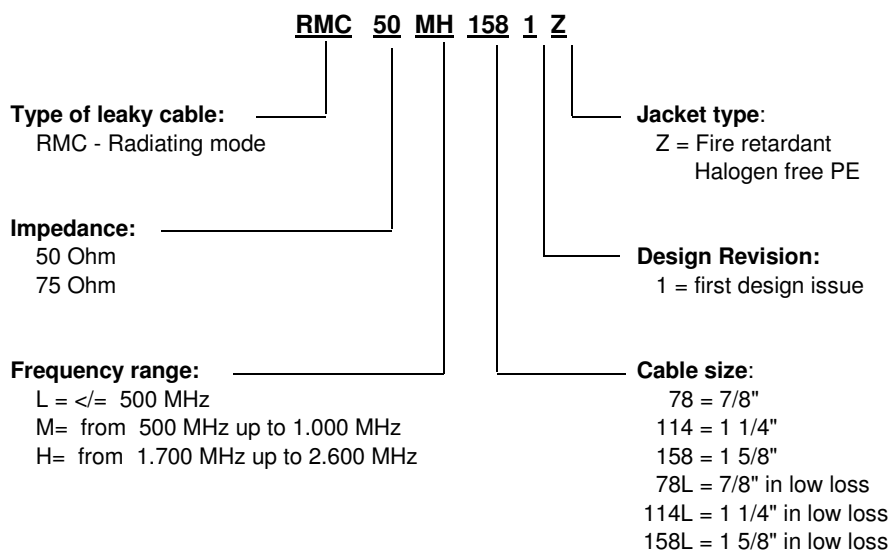




RADIATING COAXIAL CABLES



PRODUCT STRUCTURE


PRODUCT CODING RULES: COUPLING MODE COAXIAL CABLES

- Corrugated copper outer conductor

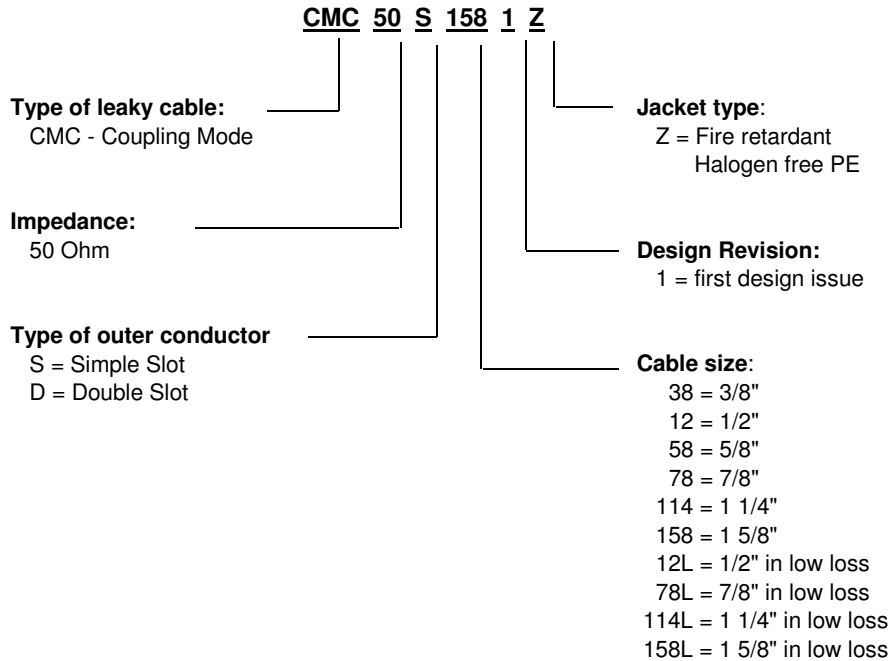

PRODUCT CODING RULES: COUPLING MODE COAXIAL CABLES


- Sparsely braided outer conductor

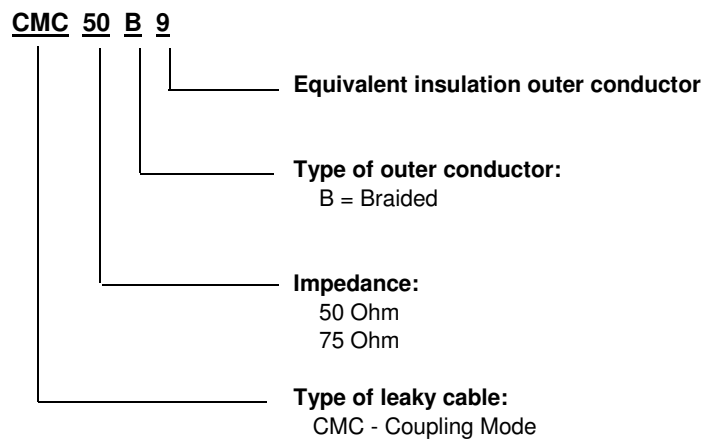

SWE

RADIATING COAXIAL CABLES

Construction and Specifications



Typical application:
 High steady communication system in wireless dispatch of railway, especially in mountain areas, tunnels, subways, etc.

RMC 75L SERIES		RMC 75L-114-1	RMC 75L-114-2	RMC 75L-114-3
INNER CONDUCTOR	Material	Smooth copper tube	Smooth copper tube	Helically corrugated copper tube
	Diameter mm	7,80	7,80	7,80
INSULATOR	Material	Physically foamed PE	Physically foamed PE	Physically foamed PE
	Diameter mm	32,50	32,50	32,50
OUTER CONDUCTOR	Material	Overlapping copper foil	Overlapping copper foil	Overlapping copper foil
	Diameter mm	32,70	32,70	32,70
JACKET	Material	PE or fire retardant PE	PE or fire retardant PE	PE or fire retardant PE
	Diameter mm	37,00	37,00	37,00

MECHANICAL PROPERTIES				
Bending radius	mm	380	380	380
Pulling strength	N	3000	3000	3000
Recommended Temperature	Store	-70°C +85°C	-70°C +85°C	-70°C +85°C
	Installation	-40°C +60°C	-40°C +60°C	-40°C +60°C
	Operation	-55°C +85°C	-55°C +85°C	-55°C +85°C

ELECTRICAL PROPERTIES				
Impedance	Ohm	75+/-2	75+/-2	75+/-2
Capacitance	pF/m	50	50	50
Propagation velocity	%	88	88	88
Insulation Dielectric Strength	kV	10,0	10,0	10,0
Jacket spark test voltage	kVAC	10,0	10,0	10,0
Insulation Resistance	Mohm - Kr	>5 x 10 ³	>5 x 10 ³	>5 x 10 ³
VSWR		<= 1,3	<= 1,3	<= 1,3

ATTENUATION and COUPLING LOSS**				
Nominal Attenuation 20°C, dB/100m at 450 MHz		2,50	2,70	3,60
Coupling Loss*** (50%/95%) dB at 450 MHz		82	72	62

NOTES:

- * Bending Test Method is according to IEC 61196.1
- ** Attenuation and Coupling Loss are measured by the free space method according to IEC 61196.4.
- *** Coupling Loss values are given with a tolerance of +/- 5 dB.

Cables

Connectors


Protections

Accessories

SWE

RADIATING COAXIAL CABLES

Construction and Specifications



Typical application: Suitable for various types of analog, digital, wireless communication for which the operating frequency is less than 500 MHz, such as railways wireless dispatching on 450 MHz, public security and fire protection dispatching on 350MHz, communications in mine on 150MHz frequency, etc.

RMC 50L LOW LOSS SERIES		RMC 50L-78L-1	RMC 50L-114L-1	RMC 50L-158L-1
INNER CONDUCTOR	Material	Smooth copper tube	Smooth copper tube	Helically corrugated copper tube
	Diameter mm	9,40	13,20	18,30
INSULATOR	Material	Physically foamed PE	Physically foamed PE	Physically foamed PE
	Diameter mm	23,00	33,10	43,50
OUTER CONDUCTOR	Material	Overlapping copper foil	Overlapping copper foil	Overlapping copper foil
	Diameter mm	23,30	33,40	43,80
JACKET	Material	PE or fire retardant PE	PE or fire retardant PE	PE or fire retardant PE
	Diameter mm	27,60	37,50	48,50


MECHANICAL PROPERTIES				
Bending radius	mm	280	381	508
Pulling strength	N	2300	3000	1700
Recommended Temperature	Store	-70°C +85°C	-70°C +85°C	-70°C +85°C
	Installation	-40°C +60°C	-40°C +60°C	-40°C +60°C
Temperature	Operation	-55°C +85°C	-55°C +85°C	-55°C +85°C

ELECTRICAL PROPERTIES				
Impedance	Ohm	50+/-1	50+/-1	50+/-1
Capacitance	pF/m	76	76	76
Propagation velocity	%	88	88	88
Insulation Dielectric Strength	kV	10,0	10,0	15,0
Jacket spark test voltage	kVAC	8,0	10,0	10,0
Insulation Resistance	Mohm - Kr	>5 x 10 ³	>5 x 10 ³	>5 x 10 ³
VSWR		<= 1,3	<= 1,3	<= 1,3

ATTENUATION and COUPLING LOSS**				
Nominal Attenuation 20°C, dB/100 m	75 MHz	1,00	0,64	0,50
	150 MHz	1,40	0,94	0,66
	350 MHz	2,60	1,60	1,20
	450 MHz	2,80	1,92	1,40
Coupling Loss*** (50%/95%) dB	75 MHz	56/60	58/68	67/72
	150 MHz	62/68	64/72	68/78
	350 MHz	53/56	56/61	65/70
	450 MHz	55/60	56/62	66/69


NOTES:

- * Bending Test Method is according to IEC 61196.1
- ** Attenuation and Coupling Loss are measured by the free space method according to IEC 61196.4.
- *** Coupling Loss values are given with a tolerance of +/- 5 dB,

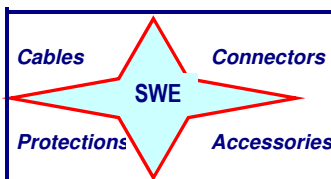

RADIATING COAXIAL CABLES

Construction and Specifications




Typical application: Suitable for various types of analog, digital wireless communication for which the operating frequency is below 1000 MHz, such as the TETRA system, GSM-R railway wireless dispatching, the mobile telecommunication system, also suitable for the above systems that also have a coverage below 500 MHz in the same occasion.

RMC 50LM LOW LOSS SERI		RMC 50LM-78L-1	RMC 50LM-114L-1	RMC 50LM-158L-1
INNER CONDUCTOR	Material	Smooth copper tube	Smooth copper tube	Helically corrugated copper tube
	Diameter mm	9,40	13,20	18,30
INSULATOR	Material	Physically foamed PE	Physically foamed PE	Physically foamed PE
	Diameter mm	23,00	33,10	43,50
OUTER CONDUCTOR	Material	Overlapping copper foil	Overlapping copper foil	Overlapping copper foil
	Diameter mm	23,30	33,40	43,80
JACKET	Material	PE or fire retardant PE	PE or fire retardant PE	PE or fire retardant PE
	Diameter mm	27,60	37,50	48,50
MECHANICAL PROPERTIES				
Bending radius	mm	280	381	508
Pulling strength	N	2300	3000	1700
Recommended Temperature	Store	-70°C +85°C	-70°C +85°C	-70°C +85°C
	Installation	-40°C +60°C	-40°C +60°C	-40°C +60°C
Operation		-55°C +85°C	-55°C +85°C	-55°C +85°C
ELECTRICAL PROPERTIES				
Impedance	Ohm	50+/-1	50+/-1	50+/-1
Capacitance	pF/m	76	76	76
Propagation velocity	%	88	88	88
Insulation Dielectric Strength	kV	10,0	10,0	15,0
Jacket spark test voltage	kVAC	8,0	10,0	10,0
Insulation Resistance	Mohm - Kr	>5 x 10 ³	>5 x 10 ³	>5 x 10 ³
VSWR		<= 1,3	<= 1,3	<= 1,3
ATTENUATION and COUPLING LOSS**				
Nominal Attenuation 20°C,dB/100 m	75 MHz	1,10	0,70	0,50
	150 MHz	1,50	1,00	0,66
	350 MHz	2,50	1,50	1,20
	450 MHz	2,70	1,80	1,40
	800 MHz	4,20	2,80	2,00
	900 MHz	4,50	3,50	2,20
Coupling Loss*** (50%/95%) dB	75 MHz	56/62	64/75	66/79
	150 MHz	62/72	71/81	68/79
	350 MHz	70/80	70/75	70/76
	450 MHz	67/77	66/70	66/69
	800 MHz	62/63	64/70	63/66
	900 MHz	62/72	62/68	62/64
NOTES:				

* Bending Test Method is according to IEC 61196.1

** Attenuation and Coupling Loss are measured by the free space method according to IEC 61196.4.

*** Coupling Loss values are given with a tolerance of +/- 5 dB.



Typical application: Suitable for public mobile telecommunication systems. It also covers 3G communication band and 2,4 GHz open frequency band, such as frequency bands used by mobile telecommunication operators.

RMC 50MH LOW LOSS SERI		RMC 50MH-78L-1	RMC 50MH-114L-1	RMC 50MH-158L-1
INNER CONDUCTOR	Material	Smooth copper tube	Smooth copper tube	Helically corrugated copper tube
	Diameter mm	9,40	13,20	18,30
INSULATOR	Material	Physically foamed PE	Physically foamed PE	Physically foamed PE
	Diameter mm	23,00	33,10	43,50
OUTER CONDUCTOR	Material	Overlapping copper foil	Overlapping copper foil	Overlapping copper foil
	Diameter mm	23,30	33,40	43,80
JACKET	Material	PE or fire retardant PE	PE or fire retardant PE	PE or fire retardant PE
	Diameter mm	27,60	37,50	48,50

MECHANICAL PROPERTIES

Bending radius	mm	280	381	508
Pulling strength	N	2300	3000	1700
Recommended Temperature	Store	-70°C +85°C	-70°C +85°C	-70°C +85°C
	Installation	-40°C +60°C	-40°C +60°C	-40°C +60°C
	Operation	-55°C +85°C	-55°C +85°C	-55°C +85°C

ELECTRICAL PROPERTIES

Impedance	Ohm	50+/-1	50+/-1	50+/-1
Capacitance	pF/m	76	76	76
Propagation velocity	%	88	88	88
Insulation Dielectric Strenght	kV	10,0	10,0	15,0
Jacket spark test voltage	kVAC	8,0	10,0	10,0
Insulation Resistance	Mohm - Kr	>5 x 10 ³	>5 x 10 ³	>5 x 10 ³
VSWR		<= 1,3	<= 1,3	<= 1,3

ATTENUATION and COUPLING LOSS**

Nominal Attenuation 20°C, dB/100 m	150 MHz	1,50	1,10	0,70
	350 MHz	2,50	1,60	1,10
	450 MHz	2,70	1,90	1,30
	800 MHz	4,10	2,80	1,90
	900 MHz	4,50	3,00	2,20
	1.800 MHz	7,90	5,60	5,20
	2.200 MHz	10,26	6,20	4,60
	2.400 MHz	11,68	7,40	4,60
Coupling Loss*** (50%/95%) dB	150 MHz	65/77	82/92	77/86
	350 MHz	72/82	90/103	86/97
	450 MHz	77/89	90/103	88/100
	800 MHz	64/75	69/72	65/68
	900 MHz	62/72	68/71	61/63
	1.800 MHz	60/66	59/65	53/55
	2.200 MHz	59/67	62/72	60/64
	2.400 MHz	60/68	60/70	60/70


NOTES:

* Bending Test Method is according to IEC 61196.1

** Attenuation and Coupling Loss are measured by the free space method according to IEC 61196.4.

*** Coupling Loss values are given with a tolerance of +/- 5 dB.

Cables	Connectors	RADIATING COAXIAL CABLES
Protections	Accessories	



Typical application: Suitable for the coverage of multi-systems public network in the subway


RMC 50LMH LOW LOSS SE		RMC 50LMH-78L-1	RMC 50LMH-114L-1	RMC 50LMH-158L-1
INNER CONDUCTOR	Material	Smooth copper tube	Smooth copper tube	Helically corrugated copper tube
	Diameter mm	9,40	13,20	18,30
INSULATOR	Material	Physically foamed PE	Physically foamed PE	Physically foamed PE
	Diameter mm	23,00	33,10	43,50
OUTER CONDUCTOR	Material	Overlapping copper foil	Overlapping copper foil	Overlapping copper foil
	Diameter mm	23,30	33,40	43,80
JACKET	Material	PE or fire retardant PE	PE or fire retardant PE	PE or fire retardant PE
	Diameter mm	27,60	37,50	48,50
MECHANICAL PROPERTIES				
Bending radius	mm	280	381	508
Pulling strength	N	2300	3000	1700
Recommended Temperature	Store	-70°C +85°C	-70°C +85°C	-70°C +85°C
	Installation	-40°C +60°C	-40°C +60°C	-40°C +60°C
	Operation	-55°C +85°C	-55°C +85°C	-55°C +85°C
ELECTRICAL PROPERTIES				
Impedance	Ohm	50+/-1	50+/-1	50+/-1
Capacitance	pF/m	76	76	76
Propagation velocity	%	88	88	88
Insulation Dielectric Strength	kV	10,0	10,0	15,0
Jacket spark test voltage	kVAC	8,0	10,0	10,0
Insulation Resistance	Mohm - Km	>5 x 10 ³	>5 x 10 ³	>5 x 10 ³
VSWR		<= 1,3	<= 1,3	<= 1,3
ATTENUATION and COUPLING LOSS**				
Nominal Attenuation 20°C, dB/100 m	75 MHz	1,10	0,70	0,50
	150 MHz	1,50	1,10	0,70
	450 MHz	2,70	1,90	1,30
	900 MHz	4,48	2,94	2,00
	1.800 MHz	7,70	5,46	3,30
	2.200 MHz	10,10	6,10	4,00
	2.400 MHz	11,68	7,40	4,60
	2.600 MHz	13,90	9,68	5,40
Coupling Loss*** (50%/95%) dB	75 MHz	60/66	75/84	74/89
	150 MHz	65/77	82/92	76/85
	450 MHz	72/84	83/93	75/78
	900 MHz	66/74	72/79	69/71
	1.800 MHz	62/70	68/74	64/68
	2.200 MHz	61/69	64/75	61/67
	2.400 MHz	60/68	59/70	60/69
	2.600 MHz	60/68	63/67	59/67

NOTES:

* Bending Test Method is according to IEC 61196.1

** Attenuation and Coupling Loss are measured by the free space method according to IEC 61196.4.


*** Coupling Loss values are given with a tolerance of +/- 5 dB.



RADIATING COAXIAL CABLES



Construction and Specifications



Typical application: Suitable for various types of analog, digital, wireless communication for which the operating frequency is less than 500 MHz, such as railways wireless dispatching on 450 MHz, public security and fire protection dispatching on 350MHz, communications in mine on 150MHz frequency, etc.

RMC 50L SERIES		RMC 50L-78-1	RMC 50L-114-1	RMC 50L-158-1
INNER CONDUCTOR	Material	Smooth copper tube	Smooth copper tube	Helically corrugated copper tube
	Diameter mm	9,00	13,00	17,30
INSULATOR	Material	Physically foamed PE	Physically foamed PE	Physically foamed PE
	Diameter mm	22,50	32,80	43,50
OUTER CONDUCTOR	Material	Overlapping copper foil	Overlapping copper foil	Overlapping copper foil
	Diameter mm	22,80	33,10	43,80
JACKET	Material	PE or fire retardant PE	PE or fire retardant PE	PE or fire retardant PE
	Diameter mm	27,30	37,00	48,00

MECHANICAL PROPERTIES

Bending radius	mm	280	380	485
Pulling strength	N	2300	3000	1700
Recommended Temperature	Store	-70°C +85°C	-70°C +85°C	-70°C +85°C
	Installation	-40°C +60°C	-40°C +60°C	-40°C +60°C
	Operation	-55°C +85°C	-55°C +85°C	-55°C +85°C

ELECTRICAL PROPERTIES


Impedance	Ohm	50+/-1	50+/-1	50+/-1
Capacitance	pF/m	76	76	76
Propagation velocity	%	88	88	88
Insulation Dielectric Strength	kV	10,0	10,0	15,0
Jacket spark test voltage	kVAC	8,0	10,0	10,0
Insulation Resistance	Mohm - Kr	>5 x 10 ³	>5 x 10 ³	>5 x 10 ³
VSWR		<= 1,3	<= 1,3	<= 1,3

ATTENUATION and COUPLING LOSS**

Nominal	75 MHz	1,06	0,83	0,56
Attenuation 20°C, dB/100 m	150 MHz	1,76	1,24	0,82
	350 MHz	3,10	2,20	1,78
	450 MHz	3,40	2,30	1,90
Coupling Loss*** (50%/95%) dB	75 MHz	56/60	58/67	66/71
	150 MHz	61/67	63/71	68/76
	350 MHz	53/56	55/60	64/69
	450 MHz	54/59	57/62	64/68


NOTES:

- * Bending Test Method is according to IEC 61196.1
- ** Attenuation and Coupling Loss are measured by the free space method according to IEC 61196.4.
- *** Coupling Loss values are given with a tolerance of +/- 5 dB.

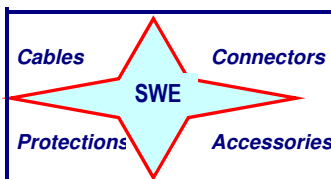

RADIATING COAXIAL CABLES

Construction and Specifications

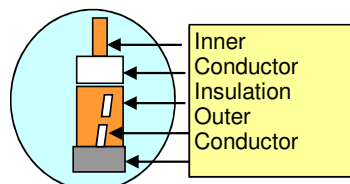


Typical application: Suitable for various types of analog, digital wireless communication for which the operating frequency is below 1000 MHz, such as the TETRA system, GSM-R railway wireless dispatching, the mobile telecommunication system, also suitable for the above systems that also have a coverage below 500 MHz in the same occasion.

RMC 50LM SERIES		RMC 50LM-78-2	RMC 50LM-114-2	RMC 50LM-158-2
INNER CONDUCTOR	Material	Smooth copper tube	Smooth copper tube	Helically corrugated copper tube
	Diameter mm	9,00	13,00	17,30
INSULATOR	Material	Physically foamed PE	Physically foamed PE	Physically foamed PE
	Diameter mm	22,50	32,80	43,50
OUTER CONDUCTOR	Material	Overlapping copper foil	Overlapping copper foil	Overlapping copper foil
	Diameter mm	22,80	33,10	43,80
JACKET	Material	PE or fire retardant PE	PE or fire retardant PE	PE or fire retardant PE
	Diameter mm	27,30	37,00	48,00
MECHANICAL PROPERTIES				
Bending radius	mm	280	380	485
Pulling strength	N	2300	3000	1700
Recommended Temperature	Store	-70°C +85°C	-70°C +85°C	-70°C +85°C
	Installation	-40°C +60°C	-40°C +60°C	-40°C +60°C
Operation		-55°C +85°C	-55°C +85°C	-55°C +85°C
ELECTRICAL PROPERTIES				
Impedance	Ohm	50+/-1	50+/-1	50+/-1
Capacitance	pF/m	76	76	76
Propagation velocity	%	88	88	88
Insulation Dielectric Strength	kV	10,0	10,0	15,0
Jacket spark test voltage	kVAC	8,0	10,0	10,0
Insulation Resistance	Mohm - Kr	>5 x 10 ³	>5 x 10 ³	>5 x 10 ³
VSWR		<= 1,3	<= 1,3	<= 1,3
ATTENUATION and COUPLING LOSS**				
Nominal Attenuation 20°C, dB/100 m	75 MHz	1,10	0,90	0,60
	150 MHz	1,90	1,30	0,90
	350 MHz	2,90	2,10	1,70
	450 MHz	3,30	2,20	1,80
	800 MHz	4,90	3,90	2,40
	900 MHz	5,30	4,30	2,70
Coupling Loss*** (50%/95%) dB	75 MHz	64/76	62/71	67/78
	150 MHz	68/80	67/80	74/86
	350 MHz	72/80	72/78	72/79
	450 MHz	69/77	70/80	69/80
	800 MHz	63/71	62/68	63/67
	900 MHz	63/73	62/68	60/63

NOTES:

- * Bending Test Method is according to IEC 61196.1
- ** Attenuation and Coupling Loss are measured by the free space method according to IEC 61196.4.
- *** Coupling Loss values are given with a tolerance of +/- 5 dB.



Typical application: Suitable for public mobile telecommunication systems. It also covers 3G communication band and 2,4 GHz open frequency band, such as frequency bands used by mobile telecommunication operators.

RMC 50MH SERIES		RMC 50MH-78-1	RMC 50MH-114-1	RMC 50MH-158-1
INNER CONDUCTOR	Material	Smooth copper tube	Smooth copper tube	Helically corrugated copper tube
	Diameter mm	9,00	13,00	17,30
INSULATOR	Material	Physically foamed PE	Physically foamed PE	Physically foamed PE
	Diameter mm	22,50	32,80	43,50
OUTER CONDUCTOR	Material	Overlapping copper foil	Overlapping copper foil	Overlapping copper foil
	Diameter mm	22,80	33,10	43,80
JACKET	Material	PE or fire retardant PE	PE or fire retardant PE	PE or fire retardant PE
	Diameter mm	27,30	37,00	48,00
MECHANICAL PROPERTIES				
Bending radius	mm	280	380	485
Pulling strength	N	2300	3000	1700
Recommended Temperature	Store	-70°C +85°C	-70°C +85°C	-70°C +85°C
	Installation	-40°C +60°C	-40°C +60°C	-40°C +60°C
	Operation	-55°C +85°C	-55°C +85°C	-55°C +85°C
ELECTRICAL PROPERTIES				
Impedance	Ohm	50+/-1	50+/-1	50+/-1
Capacitance	pF/m	76	76	76
Propagation velocity	%	88	88	88
Insulation Dielectric Strength	kV	10,0	10,0	15,0
Jacket spark test voltage	kVAC	8,0	10,0	10,0
Insulation Resistance	Mohm - Kr	>5 x 10 ³	>5 x 10 ³	>5 x 10 ³
VSWR		<= 1,3	<= 1,3	<= 1,3
ATTENUATION and COUPLING LOSS**				
Nominal Attenuation 20°C, dB/100 m	150 MHz	1,51	1,11	0,83
	350 MHz	2,54	1,85	1,49
	450 MHz	2,78	1,97	1,58
	800 MHz	4,28	2,91	2,30
	900 MHz	4,54	3,22	2,50
	1.800 MHz	8,00	5,80	4,40
	2.200 MHz	10,30	7,00	5,70
	2.400 MHz	11,80	8,20	6,50
Coupling Loss*** (50%/95%) dB	150 MHz	65/77	74/82	77/84
	350 MHz	70/80	80/87	86/97
	450 MHz	72/84	80/87	88/92
	800 MHz	65/74	69/76	65/68
	900 MHz	66/75	68/76	61/68
	1.800 MHz	62/70	61/68	57/65
	2.200 MHz	61/69	65/69	62/69
	2.400 MHz	60/68	62/68	66/72


NOTES:

* Bending Test Method is according to IEC 61196.1

** Attenuation and Coupling Loss are measured by the free space method according to IEC 61196.4.

*** Coupling Loss values are given with a tolerance of +/- 5 dB.

Cables	Connectors	RADIATING COAXIAL CABLES
Protections	Accessories	



Typical application: Suitable for the coverage of multi-systems public network in the subway

RMC 50LMH SERIES		RMC 50LMH-78-1	RMC 50LMH-114-1	RMC 50LMH-158-1
INNER CONDUCTOR	Material	Smooth copper tube	Smooth copper tube	Helically corrugated copper tube
	Diameter mm	9,00	13,00	17,30
INSULATOR	Material	Physically foamed PE	Physically foamed PE	Physically foamed PE
	Diameter mm	22,50	32,80	43,50
OUTER CONDUCTOR	Material	Overlapping copper foil	Overlapping copper foil	Overlapping copper foil
	Diameter mm	22,80	33,10	43,80
JACKET	Material	PE or fire retardant PE	PE or fire retardant PE	PE or fire retardant PE
	Diameter mm	27,30	37,00	48,00
MECHANICAL PROPERTIES				
Bending radius	mm	280	380	485
Pulling strength	N	2300	3000	1700
Recommended Temperature	Store	-70°C +85°C	-70°C +85°C	-70°C +85°C
	Installation	-40°C +60°C	-40°C +60°C	-40°C +60°C
	Operation	-55°C +85°C	-55°C +85°C	-55°C +85°C
ELECTRICAL PROPERTIES				
Impedance	Ohm	50+/-1	50+/-1	50+/-1
Capacitance	pF/m	76	76	76
Propagation velocity	%	88	88	88
Insulation Dielectric Strength	kV	10,0	10,0	15,0
Jacket spark test voltage	kVAC	8,0	10,0	10,0
Insulation Resistance	Mohm - Kr	>5 x 10 ³	>5 x 10 ³	>5 x 10 ³
VSWR		<= 1,3	<= 1,3	<= 1,3
ATTENUATION and COUPLING LOSS**				
Nominal Attenuation 20°C,dB/100 m	75 MHz	1,10	0,90	0,60
	150 MHz	1,51	1,11	0,85
	450 MHz	2,78	1,97	1,60
	900 MHz	4,50	2,94	2,48
	1.800 MHz	8,50	5,84	4,10
	2.200 MHz	10,80	8,08	5,30
	2.400 MHz	12,30	9,07	6,40
	2.600 MHz	14,00	10,27	7,30
Coupling Loss*** (50%/95%) dB	75 MHz	64/76	62/71	67/78
	150 MHz	65/77	77/83	79/86
	450 MHz	69/78	83/89	88/94
	900 MHz	69/75	68/79	64/72
	1.800 MHz	64/72	65/72	61/65
	2.200 MHz	61/67	67/70	65/70
	2.400 MHz	60/68	66/74	68/72
	2.600 MHz	60/66	63/67	62/69

NOTES:

* Bending Test Method is according to IEC 61196.1


** Attenuation and Coupling Loss are measured by the free space method according to IEC 61196.4.

*** Coupling Loss values are given with a tolerance of +/- 5 dB.



RADIATING COAXIAL CABLES

Construction and Specifications



Typical application: As a wide leaky coaxial cable, wireless mobile telecommunication, wireless remote control, wireless dispatch, wireless alarming system and so on.

CMC 50S SERIES		CMC 50S-38-1	CMC 50S-12-1
INNER CONDUCTOR	Material	Copper clad aluminium wire	Copper clad aluminium wire
	Diameter mm	3,15	4,8
INSULATOR	Material	Physically foamed PE	Physically foamed PE
	Diameter mm	8,2	12,2
OUTER CONDUCTOR	Material	Corrugated copper tube with single row milled slots	Corrugated copper tube with single row mill
	Diameter mm	9,53	13,8
JACKET	Material	PE or fire retardant PE	PE or fire retardant PE
	Diameter mm	11,2	15,8

MECHANICAL PROPERTIES			
Bending radius	mm	30	80
Pulling strength	N	1100	1130
Recommended Temperature	Store	-70°C +85°C	-70°C +85°C
	Installation	-40°C +60°C	-40°C +60°C
	Operation	-55°C +85°C	-55°C +85°C

ELECTRICAL PROPERTIES			
Impedance	Ohm	50+/-1	50+/-1
Capacitance	pF/m	76	76
Propagation velocity	%	88	88
Insulation Dielectric Strength	kV	2,5	6,0
Jacket spark test voltage	kVAC	5,0	8,0
Insulation Resistance	Mohm - Km	>5 x 10 ³	>5 x 10 ³
VSWR		<= 1,3	<= 1,3

ATTENUATION and COUPLING LOSS*				
Nominal Attenuation 20°C, dB/100 m	150 MHz	4,90	3,30	
	450 MHz	8,50	6,60	
	900 MHz	12,10	9,50	
	1.800 MHz	17,40	13,10	
	2.400 MHz	---	15,70	
Coupling Loss** (50%/95%) dB	150 MHz	60/75	62/78	
	450 MHz	68/78	70/80	
	900 MHz	70/80	71/82	
	1.800 MHz	74/86	77/88	
	2.400 MHz	---	77/87	

NOTES:

* Attenuation and Coupling Loss are measured by the free space method according to IEC 61196.4.

** Coupling Loss values are given with a tolerance of +/- 10 dB.

Cables

Connectors


Protections

Accessories

SWE

RADIATING COAXIAL CABLES

Construction and Specifications



Typical application: As a wide leaky coaxial cable, wireless mobile telecommunication, wireless remote control, wireless dispatch, wireless alarming system and so on.

CMC 50S SERIES		CMC 50S-58-1	CMC 50S-78-1
INNER CONDUCTOR	Material	Smooth copper tube	Smooth copper tube
	Diameter mm	7,05	9,00
INSULATOR	Material	Physically foamed PE	Physically foamed PE
	Diameter mm	18,00	22,50
OUTER CONDUCTOR	Material	Corrugated copper tube with single row milled slots	Corrugated copper tube with single row mill
	Diameter mm	19,80	24,90
JACKET	Material	PE or fire retardant PE	PE or fire retardant PE
	Diameter mm	22,20	27,30

MECHANICAL PROPERTIES			
Bending radius	mm	100	140
Pulling strength	N	1150	1500
Recommended Temperature	Store	-70°C +85°C	-70°C +85°C
	Installation	-40°C +60°C	-40°C +60°C
Operation		-55°C +85°C	-55°C +85°C

ELECTRICAL PROPERTIES			
Impedance	Ohm	50+/-1	50+/-1
Capacitance	pF/m	76	76
Propagation velocity	%	88	88
Insulation Dielectric Strength	kVt	6,0	10,0
Jacket spark test voltage	kVAC	8,0	8,0
Insulation Resistance	Mohm - Kr	>5 x 10 ³	>5 x 10 ³
VSWR		<= 1,3	<= 1,3

ATTENUATION and COUPLING LOSS*			
Nominal Attenuation 20°C,dB/100 m	150 MHz	2,40	1,80
	450 MHz	4,30	3,60
	900 MHz	6,40	5,10
	1.800 MHz	9,60	7,60
	2.400 MHz	11,40	9,00
Coupling Loss** (50%/95%) dB	150 MHz	70/80	66/76
	450 MHz	74/83	72/80
	900 MHz	72/83	74/85
	1.800 MHz	68/79	80/87
	2.400 MHz	73/82	78/88

NOTES:

* Attenuation and Coupling Loss are measured by the free space method according to IEC 61196.4.

** Coupling Loss values are given with a tolerance of +/- 10 dB.

Cables

Connectors


Protections

Accessories

SWE

RADIATING COAXIAL CABLES

Construction and Specifications



Typical application: As a wide leaky coaxial cable, wireless mobile telecommunication, wireless remote control, wireless dispatch, wireless alarming system and so on.

CMC 50S SERIES		CMC 50S-78L-1	CMC 50S-114-1
INNER CONDUCTOR	Material	Smooth copper tube	Smooth copper tube
	Diameter mm	9,40	13,00
INSULATOR	Material	Physically foamed PE	Physically foamed PE
	Diameter mm	23,00	32,80
OUTER CONDUCTOR	Material	Corrugated copper tube with single row milled slots	Corrugated copper tube with single row mill
	Diameter mm	25,40	35,80
JACKET	Material	PE or fire retardant PE	PE or fire retardant PE
	Diameter mm	28,00	38,80

MECHANICAL PROPERTIES			
Bending radius	mm	150	200
Pulling strength	N	1700	2500
Recommended Temperature	Store	-70°C +85°C	-70°C +85°C
	Installation	-40°C +60°C	-40°C +60°C
	Operation	-55°C +85°C	-55°C +85°C

ELECTRICAL PROPERTIES			
Impedance	Ohm	50+/-1	50+/-1
Capacitance	pF/m	76	76
Propagation velocity	%	88	88
Insulation Dielectric Strength	kVt	10,0	10,0
Jacket spark test voltage	kVAC	8,0	10,0
Insulation Resistance	Mohm - Kr	>5 x 10 ³	>5 x 10 ³
VSWR		<= 1,3	<= 1,3

ATTENUATION and COUPLING LOSS*				
Nominal Attenuation 20°C,dB/100 m	150 MHz	1,70	1,30	
	450 MHz	3,40	3,00	
	900 MHz	5,10	4,00	
	1.800 MHz	7,40	5,60	
	2.400 MHz	8,80	6,90	
Coupling Loss** (50%/95%) dB	150 MHz	66/75	70/80	
	450 MHz	72/80	75/85	
	900 MHz	72/82	77/86	
	1.800 MHz	70/81	77/88	
	2.400 MHz	69/80	78/88	

NOTES:


* Attenuation and Coupling Loss are measured by the free space method according to IEC 61196.4.

** Coupling Loss values are given with a tolerance of +/- 10 dB.



RADIATING COAXIAL CABLES

Construction and Specifications



Typical application: As a wide leaky coaxial cable, wireless mobile telecommunication, wireless remote control, wireless dispatch, wireless alarming system and so on.

CMC 50S SERIES		CMC 50S-158-1	
INNER CONDUCTOR	Material	Helically corrugated copper tube	
	Diameter mm	17,30	
INSULATOR	Material	Physically foamed PE	
	Diameter mm	43,50	
OUTER CONDUCTOR	Material	Corrugated copper tube with single row milled slots	
	Diameter mm	46,50	
JACKET	Material	PE or fire retardant PE	
	Diameter mm	49,50	

MECHANICAL PROPERTIES			
Bending radius	mm	280	
Pulling strength	N	3000	
Recommended Temperature	Store	-70°C +85°C	
	Installation	-40°C +60°C	
	Operation	-55°C +85°C	

ELECTRICAL PROPERTIES			
Impedance	Ohm	50+/-1	
Capacitance	pF/m	76	
Propagation velocity	%	88	
Insulation Dielectric Strength	kV	15,0	
Jacket spark test voltage	kVAC	10,0	
Insulation Resistance	Mohm - Km	>5 x 10 ³	
VSWR		<= 1,3	


ATTENUATION and COUPLING LOSS*			
Nominal Attenuation 20°C, dB/100 m	150 MHz	0,80	
	450 MHz	2,00	
	900 MHz	2,70	
	1.800 MHz	4,40	
	2.400 MHz	5,60	
Coupling Loss** (50%/95%) dB	150 MHz	72/84	
	450 MHz	79/85	
	900 MHz	79/85	
	1.800 MHz	80/86	
	2.400 MHz	82/88	

NOTES:

* Attenuation and Coupling Loss are measured by the free space method according to IEC 61196.4.

** Coupling Loss values are given with a tolerance of +/- 10 dB.

Cables	Connectors	RADIATING COAXIAL CABLES
Protections	Accessories	
SWE		Construction and Specifications



Typical application: As a wide leaky coaxial cable, wireless mobile telecommunication, wireless remote control, wireless dispatch, wireless alarming system and so on.


CMC 50D LOW LOSS SERIE		CMC 50D-12L-1	CMC 50D-78L-1
INNER CONDUCTOR	Material	Copper clad aluminium wire	Smooth copper tube
	Diameter mm	4,80	9,40
INSULATOR	Material	Physically foamed PE	Physically foamed PE
	Diameter mm	12,20	23,00
OUTER CONDUCTOR	Material	Corrugated copper tube with double row milled slots	Corrugated copper tube with double row milled slots
	Diameter mm	13,80	25,40
JACKET	Material	PE or fire retardant PE	PE or fire retardant PE
	Diameter mm	15,80	28,00
MECHANICAL PROPERTIES			
Bending radius	mm	80	140
Pulling strength	N	1130	1500
Recommended Temperature	Store	-70°C +85°C	-70°C +85°C
	Installation	-40°C +60°C	-40°C +60°C
	Operation	-55°C +85°C	-55°C +85°C
ELECTRICAL PROPERTIES			
Impedance	Ohm	50+/-1	50+/-1
Capacitance	pF/m	76	76
Propagation velocity	%	88	88
Insulation Dielectric Strength	kV	6,0	10,0
Jacket spark test voltage	kVAC	8,0	8,0
Insulation Resistance	Mohm - Km	>5 x 10 ³	>5 x 10 ³
VSWR		<= 1,3	<= 1,3
ATTENUATION and COUPLING LOSS*			
Nominal Attenuation 20°C,dB/100 m	150 MHz	3,15	1,75
	450 MHz	5,70	3,05
	900 MHz	8,40	4,40
	1.800 MHz	13,10	6,80
	1.900 MHz	13,60	7,00
	2.200 MHz	14,70	7,80
	2.400 MHz	15,30	8,30
Coupling Loss** (50%/95%) dB	150 MHz	59/71	66/75
	450 MHz	67/79	75/86
	900 MHz	66/78	73/83
	1.800 MHz	68/80	70/81
	1.900 MHz	69/81	70/81
	2.200 MHz	70/82	70/81
	2.400 MHz	70/82	68/80

NOTES:

* Attenuation and Coupling Loss are measured by the free space method according to IEC 61196.4.

** Coupling Loss values are given with a tolerance of +/- 10 dB.

Cables	Connectors	RADIATING COAXIAL CABLES
Protections	Accessories	
SWE		Construction and Specifications



Typical application: As a wide leaky coaxial cable, wireless mobile telecommunication, wireless remote control, wireless dispatch, wireless alarming system and so on.

CMC 50D LOW LOSS SERIE		CMC 50D-114L-1	CMC 50D-158L-1
INNER CONDUCTOR	Material	Smooth copper tube	Helically corrugated copper tube
	Diameter mm	13,20	18,30
INSULATOR	Material	Physically foamed PE	Physically foamed PE
	Diameter mm	33,10	43,50
OUTER CONDUCTOR	Material	Corrugated copper tube with double row milled slots	Corrugated copper tube with double row milled slots
	Diameter mm	35,80	46,50
JACKET	Material	PE or fire retardant PE	PE or fire retardant PE
	Diameter mm	39,40	50,30
MECHANICAL PROPERTIES			
Bending radius	mm	200	280
Pulling strength	N	2500	3000
Recommended Temperature	Store	-70°C +85°C	-70°C +85°C
	Installation	-40°C +60°C	-40°C +60°C
	Operation	-55°C +85°C	-55°C +85°C
ELECTRICAL PROPERTIES			
Impedance	Ohm	50+/-1	50+/-1
Capacitance	pF/m	76	76
Propagation velocity	%	88	88
Insulation Dielectric Strength	kV	10,0	15,0
Jacket spark test voltage	kVAC	10,0	10,0
Insulation Resistance	Mohm - Km	>5 x 10 ³	>5 x 10 ³
VSWR		<= 1,3	<= 1,3
ATTENUATION and COUPLING LOSS*			
Nominal Attenuation 20°C,dB/100 m	150 MHz	1,22	0,86
	450 MHz	2,22	1,60
	900 MHz	3,31	2,42
	1.800 MHz	5,18	3,80
	1.900 MHz	5,35	3,94
	2.200 MHz	5,92	4,36
	2.400 MHz	6,19	4,65
Coupling Loss** (50%/95%) dB	150 MHz	70/80	70/80
	450 MHz	81/93	83/93
	900 MHz	80/92	82/92
	1.800 MHz	77/88	81/91
	1.900 MHz	76/88	80/90
	2.200 MHz	77/88	80/90
	2.400 MHz	79/90	80/90

NOTES:

* Attenuation and Coupling Loss are measured by the free space method according to IEC 61196.4.

** Coupling Loss values are given with a tolerance of +/- 10 dB.

Cables

Connectors


Protections

Accessories

SWE

RADIATING COAXIAL CABLES

Construction and Specifications




Typical application: As a wide leaky coaxial cable, wireless mobile telecommunication, wireless remote control, wireless dispatch, wireless alarming system and so on.

CMC 50D SERIES		CMC 50D-12-1	CMC 50D-78-1
INNER CONDUCTOR	Material	Copper clad aluminium wire	Smooth copper tube
	Diameter mm	4,80	9,00
INSULATOR	Material	Physically foamed PE	Physically foamed PE
	Diameter mm	12,20	22,50
OUTER CONDUCTOR	Material	Corrugated copper tube with double row milled slots	Corrugated copper tube with double row milled slots
	Diameter mm	13,80	24,90
JACKET	Material	PE or fire retardant PE	PE or fire retardant PE
	Diameter mm	15,80	27,30
MECHANICAL PROPERTIES			
Bending radius	mm	80	140
Pulling strength	N	1130	1500
Recommended Temperature	Store	-70°C +85°C	-70°C +85°C
	Installation	-40°C +60°C	-40°C +60°C
	Operation	-55°C +85°C	-55°C +85°C
ELECTRICAL PROPERTIES			
Impedance	Ohm	50+/-1	50+/-1
Capacitance	pF/m	76	76
Propagation velocity	%	88	88
Insulation Dielectric Strength	kV	6,0	10,0
Jacket spark test voltage	kVAC	8,0	8,0
Insulation Resistance	Mohm - Km	>5 x 10 ³	>5 x 10 ³
VSWR		<= 1,3	<= 1,3
ATTENUATION and COUPLING LOSS*			
Nominal Attenuation 20°C,dB/100 m	150 MHz	3,21	1,80
	450 MHz	5,80	3,30
	900 MHz	8,60	5,00
	1.800 MHz	13,50	8,70
	1.900 MHz	13,90	9,00
	2.200 MHz	14,70	9,70
	2.400 MHz	15,50	10,10
Coupling Loss** (50%/95%) dB	150 MHz	57/69	65/77
	450 MHz	66/78	72/84
	900 MHz	66/78	72/84
	1.800 MHz	67/79	68/80
	1.900 MHz	70/82	68/80
	2.200 MHz	78/90	69/81
	2.400 MHz	83/95	68/80


NOTES:

* Attenuation and Coupling Loss are measured by the free space method according to IEC 61196.4.


** Coupling Loss values are given with a tolerance of +/- 10 dB.

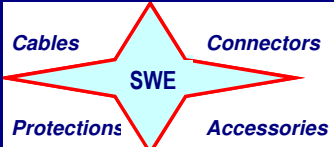

RADIATING COAXIAL CABLES



Construction and Specifications



Typical application: As a wide leaky coaxial cable, wireless mobile telecommunication, wireless remote control, wireless dispatch, wireless alarming system and so on.

CMC 50D SERIES		CMC 50D-114-1	CMC 50D-158-1
INNER CONDUCTOR	Material	Smooth copper tube	Helically corrugated copper tube
	Diameter mm	13,00	17,30
INSULATOR	Material	Physically foamed PE	Physically foamed PE
	Diameter mm	32,80	43,50
OUTER CONDUCTOR	Material	Corrugated copper tube with double row milled slots	Corrugated copper tube with double row milled slots
	Diameter mm	35,80	46,50
JACKET	Material	PE or fire retardant PE	PE or fire retardant PE
	Diameter mm	39,40	49,50
MECHANICAL PROPERTIES			
Bending radius	mm	200	280
Pulling strength	N	2500	3000
Recommended Temperature	Store	-70°C +85°C	-70°C +85°C
	Installation	-40°C +60°C	-40°C +60°C
	Operation	-55°C +85°C	-55°C +85°C
ELECTRICAL PROPERTIES			
Impedance	Ohm	50+/-1	50+/-1
Capacitance	pF/m	76	76
Propagation velocity	%	88	88
Insulation Dielectric Strength	kV	10,0	15,0
Jacket spark test voltage	kVAC	10,0	10,0
Insulation Resistance	Mohm - Km	>5 x 10 ³	>5 x 10 ³
VSWR		<= 1,3	<= 1,3
ATTENUATION and COUPLING LOSS*			
Nominal Attenuation 20°C,dB/100 m	150 MHz	1,35	1,03
	450 MHz	2,51	1,97
	900 MHz	3,81	3,00
	1.800 MHz	6,20	4,80
	1.900 MHz	6,40	4,93
	2.200 MHz	7,20	5,40
	2.400 MHz	7,40	5,80
Coupling Loss** (50%/95%) dB	150 MHz	70/82	74/86
	450 MHz	77/89	80/92
	900 MHz	66/87	79/91
	1.800 MHz	72/84	74/86
	1.900 MHz	74/86	76/88
	2.200 MHz	77/89	83/95
	2.400 MHz	79/91	85/97

NOTES:

* Attenuation and Coupling Loss are measured by the free space method according to IEC 61196.4.


** Coupling Loss values are given with a tolerance of +/- 10 dB.



RADIATING COAXIAL CABLES



Construction and Specifications



Typical application: Suitable for voice communication and data collection and so on inside the coal mine.

CMC 50B SERIES		CMC 50B-9	CMC 75B-9
INNER	Material	Copper clad aluminium wire	Copper clad aluminium wire
CONDUCTOR	Diameter mm	3,50	2,00
INSULATOR	Material	Physically foamed PE	Physically foamed PE
	Diameter mm	8,80	8,80
OUTER	Material	Sparsely braided copper wire	Sparsely braided copper wire
CONDUCTOR	Braiding Covera	40%-50%	40%-50%
FIRST	Material	Black LPDE	Black LPDE
JACKET	Diameter mm	11,70	11,70
SECOND	Material	Yellow fire retardant PVC	Yellow fire retardant PVC
JACKET	Diameter mm	15,80	13,70

MECHANICAL PROPERTIES			
Bending radius	mm	125	125
Recommende	Store	-20°C +80°C	-20°C +80°C
d	Installation	0°C +60°C	0°C +60°C
Temperature	Operation	-20°C +80°C	-20°C +80°C

ELECTRICAL PROPERTIES			
Impedance	Ohm	50+/-1	75+/-2
Capacitance	pF/m	76	50
Propagation velocity	%	86	86
Insulation Dielectric Strenght	kV	1,0	1,0
Jacket spark test voltage	kVAC	3,0	3,0
Insulation Resistance	Mohm - Kr	>5 x 10 ³	>5 x 10 ³
VSWR		</= 1,3	</= 1,3

ATTENUATION and COUPLING LOSS*			
Nominal	60 MHz	3,70	3,70
Attenuation	150 MHz	5,70	5,20
20°C,dB/100	900 MHz	9,70	9,70
m			
Coupling	60 MHz	80	75
Loss**	150 MHz	70	75
(50%/95%)	900 MHz	70	70
dB			

NOTES:

* Attenuation and CouplingLoss are measured by the free space method according to IEC 61196.4.

** Coupling Loss values are given with a tolerance of +/- 10 dB.



		DIMENSIONI CAVI RADIANTI			
		1/2"	7/8"	1 1/4"	1 5/8"
CONNECTOR TYPES	N Male	03SWR12NM0001	03SWR78NM0001	03SWR114NM001	03SWR158NM001
	N Female	03SWR12NF0001	03SWR78NF0001	03SWR114NF001	03SWR158NF001
	7/16 Male	03SWR12M71601	03SWR78M71601	03SWR114M7161	03SWR158M7161
	7/16 Female	03SWR12F71601	03SWR78F71601	03SWR114F7161	03SWR158F7161

Cables
Connectors

SWE

Protections
Accessories


RADIATING COAXIAL CABLES



Accessories: Grounding Kit

PRODUCT DESCRIPTION

- All-purpose earthing clip with 16 mm² grounding conductor for all connector sizes from 1/2" to 1-5/8"

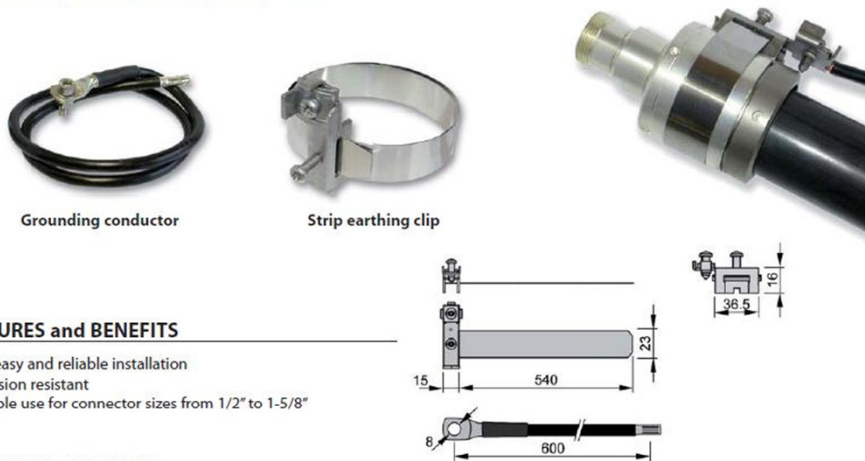

FEATURES and BENEFITS

- Fast, easy and reliable installation
- Corrosion resistant
- Multiple use for connector sizes from 1/2" to 1-5/8"

TECHNICAL FEATURES

Strip earthing clip		
• Tightening block and screws material		Nickel-plated brass
• Tightening strap material		Stainless steel
• Clamping diameter range	mm	10 ... 150
• Connection options	mm²	max. 2 conductors 2.5 - 25
Grounding conductor		
• Insulation		PVC (free of lead)
• Color		black
• Cross section	mm²	16 (copper)
• Length	mm	600
• Cable lug	mm	16 x 8
• Screw: Stainless steel, hex socket cap screw	mm	M6 x 20

PRODUCT OVERVIEW

Product reference	Contents
• 11.700.000-371	<ul style="list-style-type: none"> • 1 strip earthing clip • 1 earth lead (60 cm) with attached lug + M6 + washer + nut

Cables

Connectors

Protections

Accessories



RADIATING COAXIAL CABLES



Accessories: Cable Clic Clamp

PRODUCT DESCRIPTION

Clic clamps are used for installing radiating cables in galleries and tunnels with or without spacers. The installation is very simple and quick.

FEATURES and BENEFITS

- Lock with 1 or 2 locking positions
- Automatic locking by pushing cable into clamp, reusable
- Unlocks with screwdriver
- Pivoted hangers allow installation down to -25°C
- Slot design allows installation correction of up to 4.5 mm
- Slot for insertion of flange for rod and stud mounting



















TECHNICAL FEATURES

Clic type		Clic Clamp
• Material		Pure Polyamide, halogen free, fire class UL94HB, UV-resistant
• Environmental		
Operating Temperature	°C	-40 to +110
Installation Temperature	°C	-25 to +60
• Color		standard: black grey (RAL 7035) by request


Clic type		for 1/2"	for 5/8"	for 7/8"	for 1-1/4"	for 1-5/8"
• Clamping range	mm	14.3 - 16.8	19.5 - 22.0	24.6 - 27.8	35.5 - 39.5	46.5 - 50.5
• Max. load	N	600	700	850	1100	1300
• Part reference		03SWRCLIC012	03SWRCLIC058	03SWRCLIC078	03SWRCLIC114	03SWRCLIC158

<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> Cables  Protections </div> <div style="text-align: center;"> Connectors Accessories </div> </div>	RADIATING COAXIAL CABLES	
Accessories: Clic Cable Clamp		

SPACERS and ACCESSORIES

Reference	Description	Use with	Picture
Spacers			
• 03SWR80SRB	Round base spacer 80 mm	03SWR125WS , 03SWRM6HSH	  
• 03SWR45SRB	Rectangular base spacer 45 mm	03SWR085WS	
• 03SWR85SRB	Rectangular base spacer 85 mm	03SWR125WS	
• 03SWR75SSP	Stainless steel spacer 75 mm	03SWRM8SSP , 03SWRM6SSN	
Flat nuts			
• 03SWRM6SSN	Flat nut M6, stainless steel	All clic clamps	
Wood screws, stainless steel			
• 03SWR040WS	Wood screw 4.5 x 40 Clic Clamp without spacer		  
• 03SWR085WS	Wood screw 4.5 x 85	03SWR45SRB	
• 03SWR125WS	Wood screw 4.5 x 125	03SWR85SRB or 03SWR80SRB	
Bolt with metric thread, stainless steel			
• 03SWRM6HSH	M6 x 90, hex socket head	03SWR80SRB , 03SWRM6SSP	 
Plugs			
• 03SWR45PWS	Nylon plug for wood screw diameter 4.5 mm	Wood screws	  
• 03SWRM6SSP	Stainless steel plug M6	Bolt 03SWRM6HSH	
• 03SWRM8SSP	Stainless steel plug M8	Spacer 03SWR75SSP	
• 03SWRHSSSP	Stainless steel hammer set plug	03SWRM6SSN , 03SWR85SRB	  
• 03SWRHSPDR	Drill for installation of the hammer set plugs	03SWRHSSSP	
• 03SWRHSPTO	Setting tool of the hammer set plugs	03SWRHSSSP	

INSTALLATION EXAMPLES

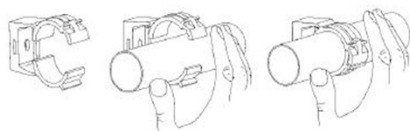


Single-hand installation – a matter of course with CLIC, place the cable, apply slight pressure and the clamp locks itself with a sharp clic.


1. Installation with wood screw and Nylon plug



2. Installation with Spacers, buttonhead wood screw pressed-on washer and Nylon plug

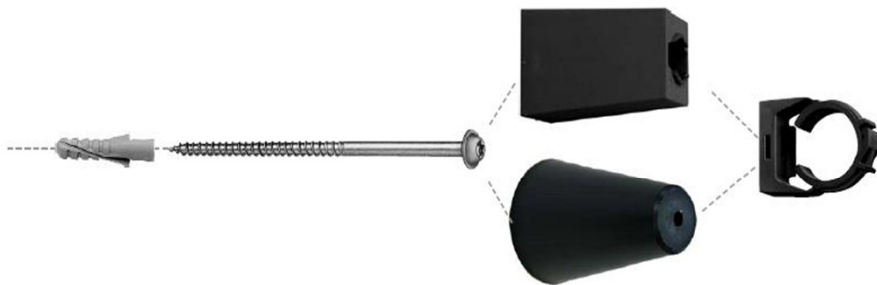

3. Installation with Hammer Set Plug (with or without spacer)

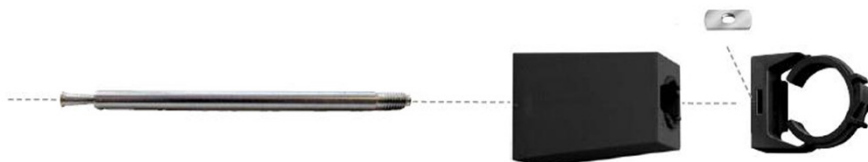

4. Installation with M8/M6 stainless steel spacer, FN6 and flush metal anchor



PRODUCT DESCRIPTION

Stainless Steel Cable Clamps are used to provide Fire Resistant installations of Radiating Cables in galleries or tunnels with or without spacers. The installation is very simple and quick. To limit the interference that could be caused by Metal Objects on the RF Field generated by a Radiating Cable, only every 10th fixing should be metallic.

Stainless Steel Cable Clamp


Cable type	Clamp type	Use with
• 1/2"	03SWRSSCC20	Hammer set plug
• 5/8"	03SWRSSCC25	03SWRHSSSP
• 7/8"	03SWRSSCC32	or
• 1-1/4"	03SWRSSCC46	Stainless Steel spacer
• 1-5/8"	03SWRSSCC50	03SWR75SSP



TECHNICAL FEATURES

Clamp Type	Ø min. mm	Max. Load (N)
• 03SWRSSCC20	13	450
• 03SWRSSCC25	18	380
• 03SWRSSCC32	24	300
• 03SWRSSCC46	39	230
• 03SWRSSCC50	51	180

Installation with M8/M6 spacer and stainless steel clamp

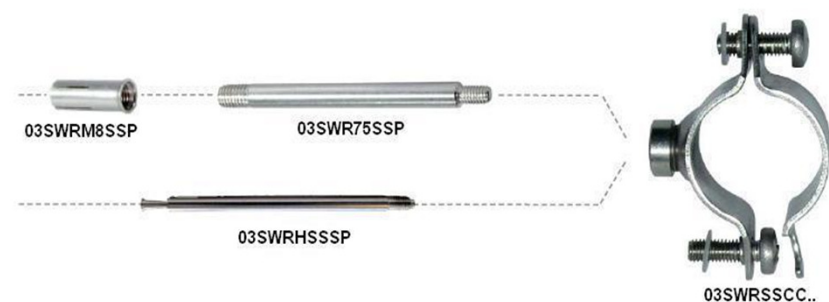



DET NORSKE VERITAS QUALITY MANAGEMENT SYSTEM CERTIFICATE

Certificato No. / Certificate No. **CERT-01876-97-AQ-MIL-SINCERT**

Si attesta che / This certifies that

il sistema di gestione per la qualità di / the quality management system of

CPE Italia S.p.A.

Via Dante Chiasserini, 15 - 20157 Milano (MI) - Italy
SS. Appia Km. 195,000 - 81047 Vitulazio (CE) - Italy

È conforme ai requisiti della norma per i sistemi di gestione per la qualità
Conforms to the quality management systems standard

UNI EN ISO 9001:2008 (ISO 9001:2008)

Questa certificazione è valida per il seguente campo applicativo:

This certificate is valid for the following products or services:

(Ulteriori chiarimenti riguardanti lo scopo e l'applicabilità dei requisiti della normativa si possono ottenere consultando l'organizzazione certificata)
(Further clarifications regarding the scope and the applicability of the requirements of the standard(s) may be obtained by consulting the certified organization)

**Progettazione, assemblaggio e commercializzazione di componenti coassiali passivi
per telecomunicazioni e componenti passivi per trasmissione dati**

Design, assembly and trade of coaxial passive components for the telecommunication and
passive components for data transmission

Data Prima Emissione
First Issue Date
1997-06-18

Data di scadenza
Expiry Date
2013-09-28

Luogo e data
Place and date
Agrate Brianza, (MI) 2010-09-28

SINCERT
INTERNATIONAL STANDARD ORGANIZATION

per l'Organismo di Certificazione
for the Accredited Unit
DET NORSKE VERITAS ITALIA S.R.L.

Settore EA : 19

Pasquale Talucci
Lead Auditor

Vittore Marangon
Management Representative

La validità del presente certificato è subordinata a sorveglianza periodica (ogni 6, 9 o 12 mesi) e al riesame completo del sistema con periodicità triennale.
The validity of this certificate is subject to periodical audits (every 6, 9 or 12 months) and the complete re-assessment of the system every three years.
Le aziende in possesso di un certificato valida sono presenti nella banca dati del sito www.dnv.it e sul sito www.sincert.it. - All the companies with a valid certificate are online at the following addresses: www.dnv.it and www.sincert.it



DET NORSKE VERITAS QUALITY MANAGEMENT SYSTEM CERTIFICATE

Certificato No. / Certificate No. **11044-2007-AQ-ITA-SINCERT**

Si attesta che / This certifies that

il sistema di gestione per la qualità di / the quality management system of

CPE Italia S.p.A.

Via Dante Chiasserini, 15 - 20157 Milano (MI) - Italy
SS. Appia Km. 195,000 - 81047 Vitulazio (CE) - Italy

È conforme ai requisiti della norma per i sistemi di gestione per la qualità
Conforms to the quality management system standard

UNI EN ISO 9001:2008 (ISO 9001:2008)

e / and
UNI EN 9100:2005 (EN 9100:2003)

Certificazione rilasciata in conformità al Regolamento Tecnico SINCERT RT - 18

Certification has been granted in conformity with the SINCERT Technical Regulation RT - 18

La Verifica è stata condotta in accordo ai requisiti della Norma EN 9104. DNV è accreditato da SINCERT sotto il controllo dello Schema Europeo Aerospaziale.
The assessment was performed in accordance with the requirements of the Norm EN 9104. DNV is accredited by SINCERT under the control of the Aerospace European Scheme

Questa certificazione è valida per il seguente campo applicativo

This certificate is valid for the following products or services:

(Ulteriori chiarimenti riguardanti lo scopo e l'applicabilità dei requisiti della normativa si possono ottenere consultando l'organizzazione certificata)
(Further clarifications regarding the scope and the applicability of the requirements of the standard(s) may be obtained by consulting the certified organization)

**Assemblaggio e commercializzazione di componenti coassiali passivi per
telecomunicazioni e componenti passivi per trasmissione dati**

Assembly and trade of coaxial passive components for the telecommunication and
passive components for data transmission

Data Prima Emissione
First Issue Date
2007-10-26

Data di scadenza
Expiry Date
2013-09-28

Luogo e data
Place and date
Agrate Brianza, (MI) 2010-09-28

SINCERT
INTERNATIONAL STANDARD ORGANIZATION

per l'Organismo di Certificazione
for the Accredited Unit
DET NORSKE VERITAS ITALIA S.R.L.

Settore EA : 19

Pasquale Talucci
Lead Auditor

Vittore Marangon
Management Representative

La validità del presente certificato è subordinata a sorveglianza periodica (ogni 6, 9 o 12 mesi) e al riesame completo del sistema con periodicità triennale.
The validity of this certificate is subject to periodical audits (every 6, 9 or 12 months) and the complete re-assessment of the system every three years.
Le aziende in possesso di un certificato valida sono presenti nella banca dati del sito www.dnv.it e sul sito www.sincert.it. - All the companies with a valid certificate are online at the following addresses: www.dnv.it and www.sincert.it



DET NORSKE VERITAS ENVIRONMENTAL MANAGEMENT SYSTEM CERTIFICATE

Certificato No. / Certificate No. **74833-2010-AE-ITA-SINCERT**

Si attesta che / This certifies that

il sistema gestione ambientale di / the environmental management system of

CPE ITALIA S.p.A.

Via Dante Chiasserini, 15 - 20157 Milano (MI) - Italy

È conforme ai requisiti della normativa

Conforms to the environmental management system standard

UNI EN ISO 14001:2004 (ISO 14001:2004)

Certificazione rilasciata in conformità al Regolamento Tecnico SINCERT RT - 09

Certification has been granted in conformity with the SINCERT Technical Regulation RT - 09

Questa certificazione è valida per il seguente campo applicativo:

This certificate is valid for the following products or services:

**Progettazione e assemblaggio mediante la fasi di taglio, saldatura e moldatura di
componenti coassiali passivi per telecomunicazioni e componenti passivi per trasmissione dati**

Design and assembling through the following processes: cutting, soldering, molding of
coaxial passive components for both telecommunication and for data transmission

Data di scadenza
Expiry Date
2013-03-09

Luogo e data
Place and date
Agrate Brianza, (MI) 2010-03-09

SINCERT
INTERNATIONAL STANDARD ORGANIZATION

per l'Organismo di Certificazione
for the Accredited Unit
DET NORSKE VERITAS ITALIA S.R.L.

Settore EA : 19

Mara Zaccari
Lead Auditor

Vittore Marangon
Management Representative

La validità del presente certificato è subordinata a sorveglianza periodica (ogni 6, 9 o 12 mesi) e al riesame completo del sistema con periodicità triennale.
The validity of this certificate is subject to periodical audits (every 6, 9 or 12 months) and the complete re-assessment of the system every three years.
Le aziende in possesso di un certificato valida sono presenti nella banca dati del sito www.dnv.it e sul sito www.sincert.it. - All the companies with a valid certificate are online at the following addresses: www.dnv.it and www.sincert.it



UL ONLINE CERTIFICATIONS DIRECTORY

UL Online Certifications Directory

ZPFW2.E327870
Wiring Harnesses - Component


CPE ITALIA SPA
VIA D.CHIASSERINI 15
20157 MILANO, MI ITALY



E327870

Underwriters Laboratories Inc.®

An independent organization working for a safer world with integrity, precision and knowledge.



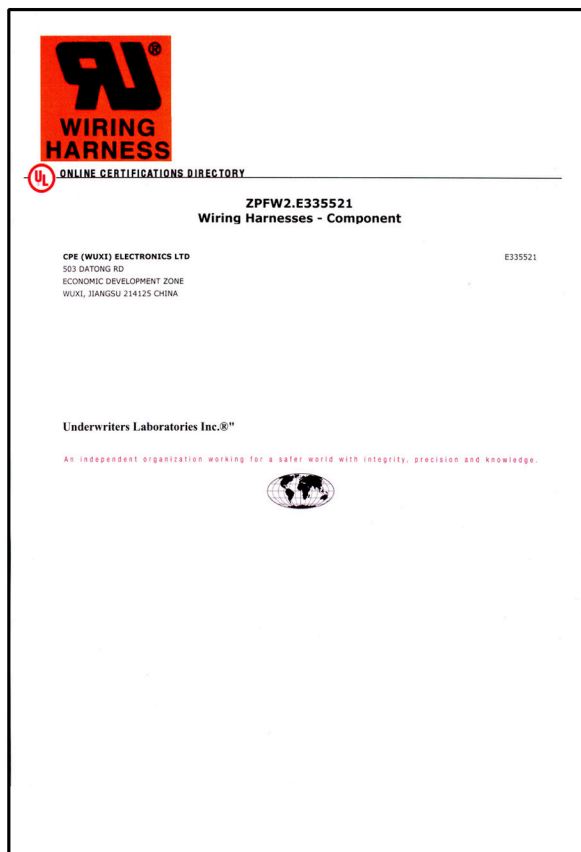

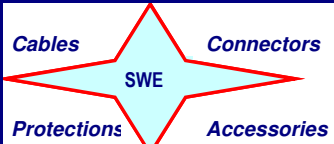 <p><i>Cables</i></p> <p><i>Connectors</i></p> <p><i>Protections</i></p> <p><i>Accessories</i></p> <p>SWE</p>	<p>RADIATING COAXIAL CABLES</p>	
<p>Notes</p>		



1-CPE Italia GROUP

(Headquarter, Technical Operation & Lab)

Via Chiasserini, 15
20157 Milano (Italy)
Ph. +39 (0) 2.390961
Fax +39 (0) 2.3570774
info@cpeitalia.it

2-CPE Italia

(Main Italian Production Plant)

Via Appia, Km. 196,150
81041 Vitulazio - CE (Italy)
Ph. +39 (0) 823.969180
Fax +39 (0) 823.997318
info@cpeitalia.it

3-CPE East Europe

Str. Pitesti, 222
Slatina - OLT (Romania)
Ph. +40 249414262
Fax +40 249414262
sales@cpeitalia-group.com



4-CPE do Brasil
(Ind. & Com. Ltda)

Rua Inaja, 698 – Vila E. Perneta
BR-83.324.050 PINHAIS-PR/Brasil
Ph. +55 41 30336883
Fax +55 41 36686883
info@cpedobrasil.com.br

5-CPE WuXi Electronics Ltd.

n.503 Da Tong Road
Bin Hu District, WuXi City, JiangSu Province
P.R. China, 214124
Ph. +86 (0) 510 85189768
Fax +86 (0) 510 85188016
sales@cpeitalia.com

6-CPE China
(Shanghai Office)

Rm 2205, n.58 JinXin Road
JinQiao, Pudong, Shanghai
P.R. China, 201206
Ph. +86 (21) 503 20587
Fax +86 (21) 503 20587
sales@cpeitalia.com


STARWIRES ENGINEERING-SWE

n.503 Da Tong Road
Bin Hu District, WuXi City, JiangSu Province
P.R. China, 214124
Ph. +86 (0) 510 85189768
Fax +86 (0) 510 85188016
sales@cpeitalia.com

Broadcasting



Navy

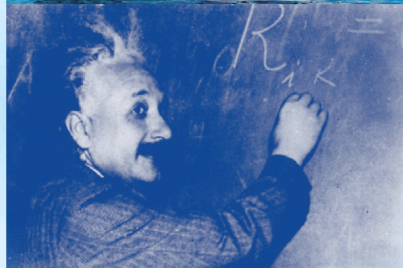

Telecommunication

Avionics Aerospace

Research Institutes



STARWIRES ENGINEERING - SWE

n.503 Da Tong Road

Bin Hu District, WuXi City, Jiangsu Province

P.R. China, 214124

Tel. 0086.51085189768 - Fax. 0086.51085188016

E-mail: sales@starwires-engineering.com

